


Standard Rooflights

Williaam Cox Mark 3

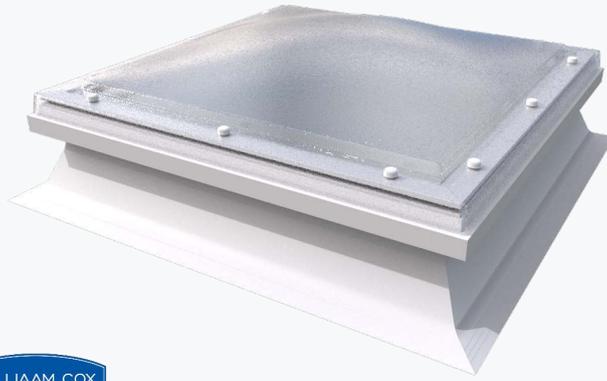

Product Overview

The Williaam Cox Mark 3 range is a square or rectangular shaped rooflight dome. It is available in double or triple or quadruple glazed domes and can come with a uPVC upstand (various heights available) or can suit a preformed builder's upstand. Ventilation options are available - trickle, manual hinged and electrical hinged. To achieve greater thermal performance we can include a double glazed unit of Glass to the internal of the unit. All configurations are tested and certified to 'Class B - Non Fragile to ACR[M]001:2000.



Application

The Williaam Cox Mark 3 range is a high quality, universal rooflight system.

The range is based on insulated uPVC Upstands, of varying heights with double / triple / quadruple skin polycarbonate glazing.

- Various glazing options available which provide excellent thermal efficiency.
- A quality, economical Part L compliant system.
- Security fixings supplied as standard.
- Complies to current BS476 fire rating Class B Non Fragile to ACR: M 2006.
- Suitable for any roofing application.
- Maintenance free UV stable uPVC construction.



Williaam Cox offers an **extensive range of rooflight options**.
Please speak to our sales department to discuss your requirements



Williaam Cox Ltd, Cloverhill Industrial Estate,
Clondalkin, Dublin 22, Ireland

+353 (0)1 460 5400

admin@williamcox.ie

www.williamcox.com

Standard Rooflights

Williaam Cox Mark 3



Specification

Manufacturer	Williaam Cox Ltd., Cloverhill Industrial Estate, Clondalkin, Dublin Ph: +353 (0)1 4605400, Email: admin@williaamcox.ie
Product Ref	Williaam Cox Mark 3
Type	Low rise curved profile glazing Opening Options: Fixed/ Ventilated/ Manual Opening/ Powered Opening
Sizes	<ul style="list-style-type: none">• 450mm x 450mm• 600mm x 600mm• 600mm x 900mm• 600mm x 1200mm• 600mm x 1500mm• 750mm x 750mm• 900mm x 900mm• 900mm x 1200mm• 900mm x 1500mm• 900mm x 1800mm• 1200mm x 1200mm• 1200mm x 1500mm• 1200mm x 1800mm• 1200mm x 2400mm• 1350mm x 1350mm• 1500mm x 1500mm• 1800mm x 1800mm• 1950mm x 1800mm• 2100mm x 1800mm• 2250mm x 1800mm• 2400mm x 1800mm <p>More sizes available</p>
Kerb	Rigid Multiwall PVC kerb with 150mm Membrane termination point
Glazing	Outer glazing to be 3mm Polycarbonate glazing with co-extruded UV protection in various options Tint options: Clear / Diffused / Bronze / Opal Fire rating: Class B-s1, dO to BS EN 13501-1:2002 Non-Fragile Class B to ACR [M] 001:2005
Other information:	U value up to 0.9 W/m ² K possible