

Standard Rooflights

Williaam Cox Glasslite Circular



The Williaam Cox Glasslite Circular is designed to bring maximum daylight to contemporary interior spaces. It is a premium round rooflight which offers elegant aesthetics and excellent technical performance.

The double glazed glass panel is made up of: 6mm toughened outer, a 90% argon filled cavity, with a laminated inner (including PVB interlayer). All double glazed units include a soft coat Low E coating.

The frame is aluminium, with a powder coating (RAL 7016) to provide a premium appearance and highly appealing finish, and is thermally isolated to provide excellent thermal performance.

The Glass and aluminium can be recycled at the end of useful product life.



- Modern and stylish circular flat glass rooflight design available in a range of standard sizes.
- Elegant aluminium frame powder coated to RAL 7016 as standard.
- U_r Value as low as 1.16 W/m² K.
- Laminated inner pane for safety
- Tested to be non-fragile to CWCT TN-67 for class 1 roofs when new and installed to manufacturers installation guides.
- Suitable for mounting directly to a builder's upstand, or with our proprietary robust insulated GRP kerb.



Williaam Cox offers an **extensive range of rooflight options**.
Please speak to our sales department to discuss your requirements

Standard Rooflights

Williaam Cox Glasslite Circular




Specification

Manufacturer	Williaam Cox Ltd., Cloverhill Industrial Estate, Clondalkin , Dublin 22 Ph: +353 (0)1 460 5400, Email: admin@williaamcox.ie
Product Ref	Williaam Cox Glasslite Circular
Type	Thermally isolated circular aluminium framed double glazed glass rooflight. Suitable for roof applications with a pitch of 2° - 15°
Sizes	Standard rooflight sizes available 600mm ø 700mm ø 900mm ø 1050mm ø 1200mm ø 1350mm ø 1500mm ø Bespoke sizes also available, please consult our sales team
Kerb	Available with GRP Kerb with 150mm membrane termination point.
Opening options	None
Ventilation options	None
Fixing options	Direct fixing to preformed and pre weathered builders up stand. Optional GRP Kerb with 150mm membrane termination point.
Glazing	Double Glazed glass unit comprising of the following: Outer Pane: 6mm Toughened Glass Spacer: 16mm 90% Argon Gas filled Inner Pane: 7.5mm (3/1.5PVB/3) Laminated Low E Softcoat Centre pane U value of 1.1 W/m²K



Product Dimensions:

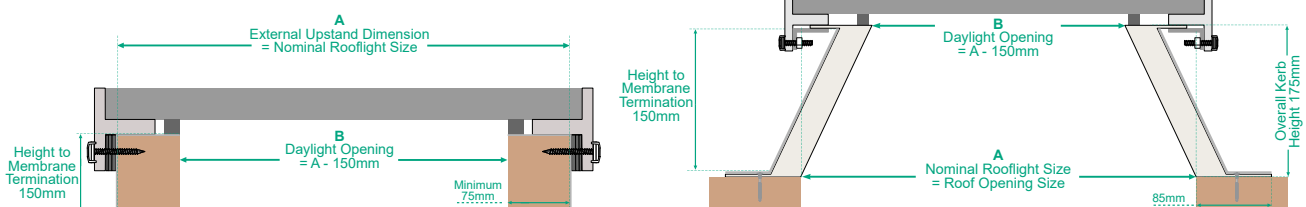

Williaam Cox offers an **extensive range of rooflight options**.
Please speak to our sales department to discuss your requirements