


# Williaam Cox Brakel® Lumera



## Product Overview

SHEV Application

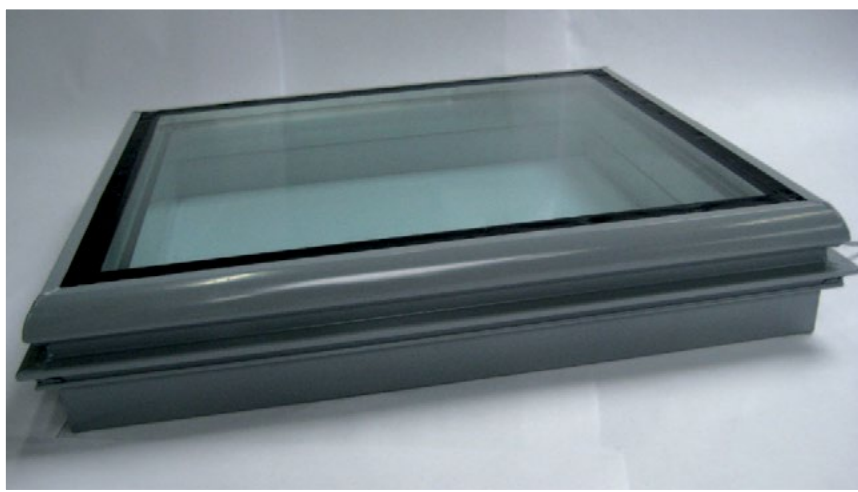

Manufacturer	Brakel (www.brakel.com)
Type	Williaam Cox opening light, type Brakel® Lumera
Description	Opening light, controls completely concealed within the construction when closed, suitable for ventilation purposes
Operation	24Vdc supply (M24)
Frame	Thermally separated
Glazing	Silicone structural -insulated glass (thickness 28 to 37 mm) type **
Flange sizes (w x l)	*** x *** mm (identical)
Opening angle	*** °
Hinge side	Bottom
Aerodynamic flow	*** m <sup>2</sup>
Installation	Installation in glass roof construction
Protection	To match glass roof construction enamel finish with *** polyester layer, layer thickness *** mu, in standard RAL colour (group ***)
Air tightness	EN1026: 650 Pa, / EN 12207: class 4
Air leakage	< 0.1 m <sup>3</sup> /hr/m <sup>2</sup> at 50 Pa
Water tightness	EN1027: 650 Pa / EN 12208: class 4

# Smoke Ventilators

## Williaam Cox Brakel® Luma

Resistance to varying load	EN 12211: 1500 Pa (=P2), strength 3000 Pa EN 12210: class E3000
Test	EN 12101-2
Extra	Trapezium / triangular design possible
Important	To satisfy guarantee conditions opening light must be closed automatically during rain and high winds (> 14 m/s), except in the event of fire, when the opening light will be required for the extraction of the resulting smoke and heat. Installation of a rain sensor and wind speed meter is therefore essential.

## Product Overview

SHEV Application



Manufacturer	Brakel (www.brakel.com)
Type	Williaam Cox opening light, type Brakel® Lumera
Description	Opening light, controls completely concealed within the construction when closed, suitable for ventilation purposes
Operation	24Vdc supply (M24)
Frame	Thermally separated
Glazing	Silicone structural -insulated glass (thickness 28 to 37 mm) type**
Flange sizes (w x l)	*** x *** mm (identical)
Opening angle	*** °
Hinge side	Bottom / side
Aerodynamic flow	*** m <sup>2</sup>
Installation	Installation in glass roof construction
Protection	To match glass roof construction enamel finish with *** polyester layer, layer thickness *** mu, in standard RAL colour (group ***)
Air-tightness	EN1026: 650 Pa, / EN 12207: class 4
Air leakage	< 0.1 m <sup>3</sup> /hr/m <sup>2</sup> at 50 Pa
Water tightness	EN1027: 650 Pa / EN 12208: class 4
Resistance to varying load	EN 12211: 1500 Pa (=P2), strength 3000 Pa, EN 12210: class E3000
Extra	Trapezium / triangular design possible
Important	To satisfy guarantee conditions opening light must be closed automatically during rain and high winds (> 14 m/s). Installation of a rain sensor and wind speed meter is therefore essential